uniforma

HIGH QUALITY, ENERGY EFFICIENT, HIGH CRI

Color Rendering Index(CRI)

The CRI is higher,
and the color is more natural.
Full range of COLORS LED are
with CRI>90,
presenting the true color for you.



2600-2800K 3000-3200K 4000-4200K 6000-6500K



www.uni-forma.com

LED Strip - Frequently Asked Questions

PCB color:

Now we mostly do the strips with white PCB.
If you need other colors ,we can also make the PCB color with yellow and black.



Waterproof Grade:

We can do different waterproof ways for the LED strips for variable use:



IP20: Non waterproof;
IP65A: Nano coating~NEW TECH! ;
IP65B: With PU/silicone glue on the front side just not on the back side;
IP67A: With silicone tube outside;
IP67B: With heat shrink tube outside~ Best way to Control the color consistency for waterproof strips;
IP68: Silicone tube inject silicone glue;

What LED chip are we use?

EPISTAR

The LEDs on our LED Strip are from by an established (1996) Manufacturer in Taiwan called Epistar, The LEDs have proved themselves to have a long lifetime and are of very high quality, a lifetime of at least 50,000 hours can be expected.

Many of the cheaper LED Strips and Strips use LEDs which from the outside look identical to the Epistar LEDs but they are cheap Chinese copies with poor internal materials which give rise to a short lifespan. The LEDs on these cheap strips are usually mounted to a very thin circuit board with copper tracks which do not adequately dissipate the heat away from the LEDs further shortening the lifetime of the product. Most of these LED Strips are designed for short term use such as festival and holidays.
The cheap Chinese LED Strips can also have LEDs which are poorly graded for color consistency so the colour along the length of the same strip can look very uneven, for example some LEDs may appear a different white color to others which can look blue or warm white in color.For long term use and professional installation our LED Strip is a much wiser choice.

What does CRI mean and why is CRI important in LED lighting?

Can't tell the difference between the black and navy colored socks in your walk in closet? Could be that your current lighting source has a very low CRI! Not all light is made equal; some light renders color better than others. Color Rendering Index (CRI) is the measurement of how colors look under a light source when compared with sunlight. The index is measured from 0-100, with a perfect 100 indicating that colors under the light source appear the same as they would under natural sunlight.

Full range of our LED strips are with CRI >95, presenting the true color for you.





CE RoHS

uniforma

What certificate do we have?

We have the CE RoHS certificate for the European clients and also get UL/CUL listed for the American &Canada clients.
UL file No. E476561.

Can I solder the LED Strips?

Yes, you can solder wire to any of the copper ports to connect strips together.



Can I use a battery to power the light strips?


Yes, you can power our strip lights with any 5v/12v/24v power source.


What is the maximum length of LED Strip that can be powered?


We sell strips in spools of 16.4 Ft (5 meters).
If you want to used with more than 5M length,

we recommend the following instruction :

1.Direct connecting
2.Multiple connecting
3.Two-way connecting

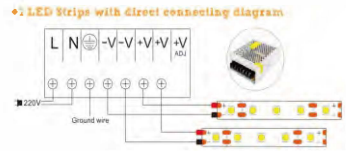

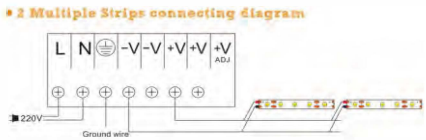

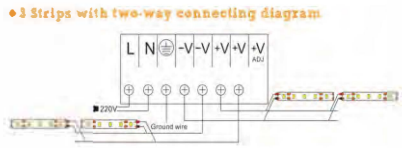

Can I cut my LED Strip Lights?

Yes. You can cut the strips with a regular, household scissor at any of the marked cut lines. These lines are designated on the strip by a solid line with the image of a scissor right next to it.



If I connect the strip backwards (+) to (-) and (-) to (+) will that ruin the strip?

No. LEDs are diodes so they only let power through in one direction. Simply reverse the wires and the strip will work fine.

Can the strips be used in high temperature areas?

No. While LEDs are quite durable and will work great in most any environment, heat is the main cause for shortened LED lifespan. Therefore, the cooler you can keep the LEDs, the longer they will last (if you can keep them below 80°C you should get the rated life out of them). With this in mind, leaving them on for extended periods of time while on the reel or bunched up in a confined space will shorten their lifespan.

Can LED strip and LED Strips be dimmed?

Yes, but this should be done by using one of our dimmers between the LED Strip and the output of the Power Supply. It should not be dimmed from a standard wall dimmer.

Can you put Logo on the LED strips?


Yes,we can print the company logo on the strips and the MOQ is 2000M for one type to print the logo.

How many warranty years for the LED strips

We offer 2yr warranty of our LED strips.

What tape do you used in the LED strips?

We have yellow and white 3M tape for the strips and also the Tesa tape to get a strong viscous when paste inside the aluminum profile.





HIGH QUALITY, ENERGY EFFICIENT, HIGH CRI

This product was initially designed to be used for professional photographers and the film industry. It is quickly becoming integrated in high end grocery product and produce displays, art galleries and museums, donut and pastry racks, in retail locations and dressing rooms and jewelry cases, as well as under residential cabinets and cupboards.

Color Rendering Index(CRI)



The CRI is higher,
and the color is more natural.
Full range of COLORS LED are
with CRI>90,
presenting the true color for you.





NEW 3535 RGB STRIPS >>>

www.uni-forma.com

RGB

uniforma

HH-SRGB30F010-3535(12VDC)

FEATURES


- New SMD 3535 RGB color changing led strips.
- DC 12V.
- Power 6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	6watts/m
Width	10mm
LED Qty	30LED/m
Voltage	12VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

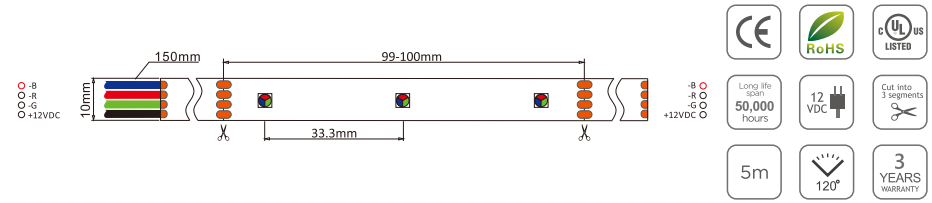

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB60F010-3535(12VDC)

RGB

FEATURES


- New SMD 3535 RGB color changing led strips.
- DC 12V.
- Power 12watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	12watts/m
Width	10mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	/
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

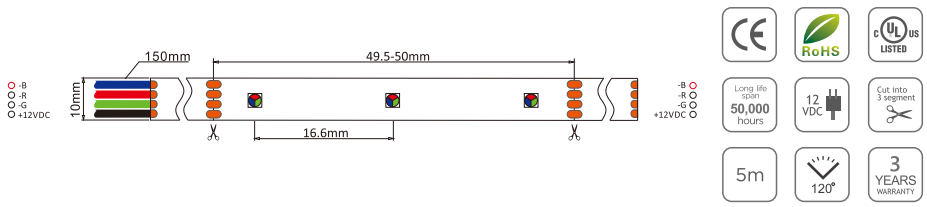

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB120F010-3535(24VDC)

RGB

FEATURES


- High density 3535 RGB color changing led strips, single row.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	10mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	/
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

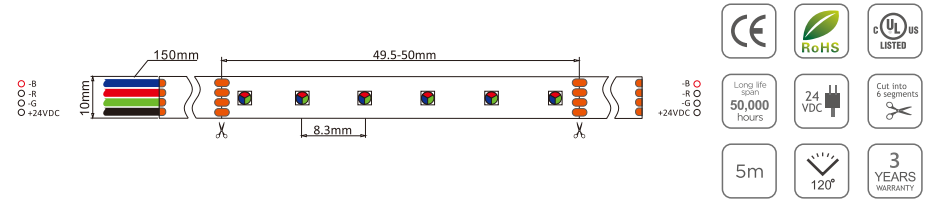

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

Genearl Lighting Strips

2835 Flexible Strip >>>

- 6 Watts/M 15
- 9.6 Watts/M 17
- 12 Watts/M 19
- 15.6 Watts/M 21
- 19 Watts/M 23
- 24 Watts/M 25

5050 Flexible Strip >>>

- 7.2 Watts/M 27
- 11.5 Watts/M 29
- 14.4 Watts/M 31
- 18 Watts/M 33
- 28.8 Watts/M 35

RGB 5050 Flexible Strip >>>

- 7.2 Watts/M 37
- 11.5 Watts/M 39
- 14.4 Watts/M 41
- 28.8 Watts/M 43

3528 Flexible Strip >>>

- 2.4 Watts/M 45
- 4.8 Watts/M 47
- 9.6 Watts/M 49


uniforma



2835 FLEXIBLE STRIPS >>>

HH-S30F008-2835(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

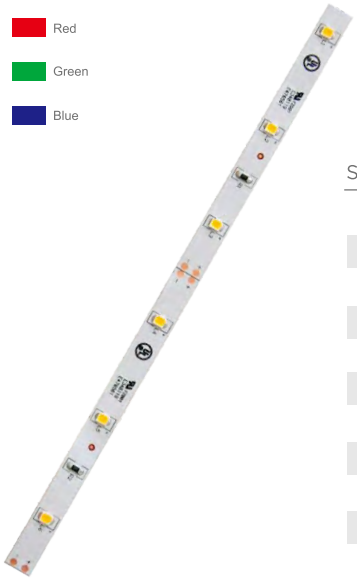


FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	6watts/m
Width	8mm
LED Qty	30LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S30F008-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	6watts/m
Width	8mm
LED Qty	30LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S48F008-2835(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	8mm
LED Qty	48LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S48F008-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

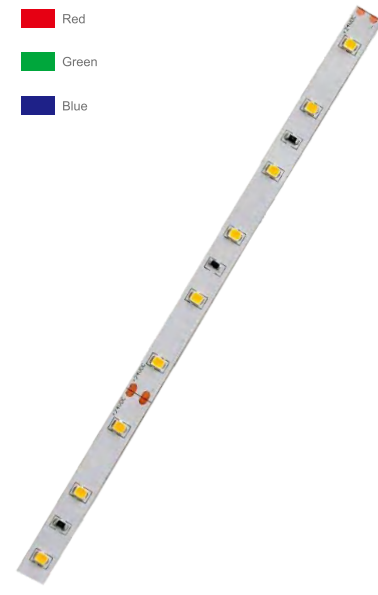


FEATURES


- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	8mm
LED Qty	48LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F008-2835(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 12watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	12watts/m
Width	8mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F008-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

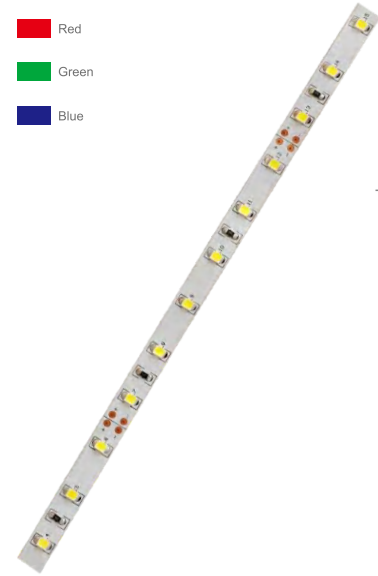


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 12watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	12watts/m
Width	8mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S78F008-2835(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 15.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	15.6watts/m
Width	8mm
LED Qty	78LED/m
Voltage	12VDC
Brightness	22-24m/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS


-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S78F008-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

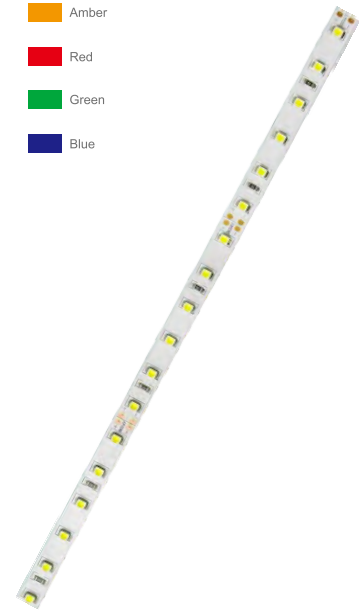


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 15.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	15.6watts/m
Width	8mm
LED Qty	78LED/m
Voltage	24VDC
Brightness	22-24m/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S96F010-2835(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

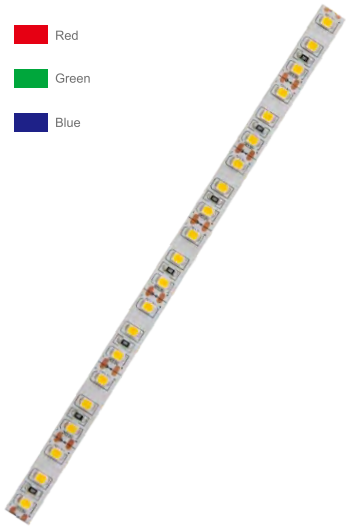


FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 19watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	19watts/m
Width	10mm
LED Qty	96LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

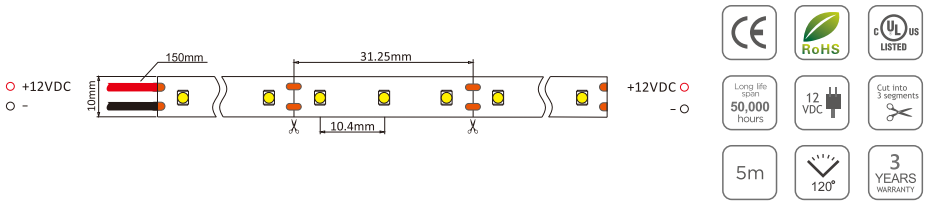


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S96F010-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

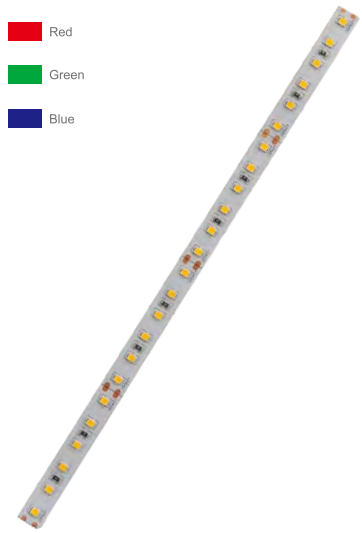


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 19watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	19watts/m
Width	10mm
LED Qty	96LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

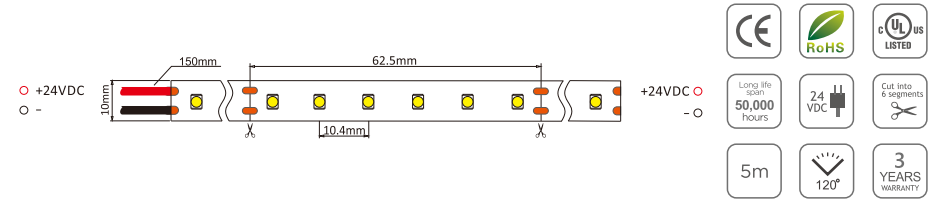

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F010-2835(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	10mm
LED Qty	120LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

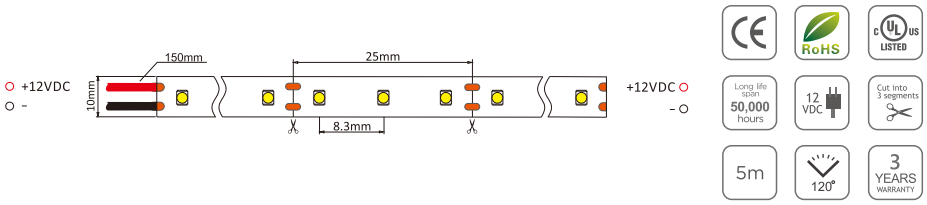


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F010-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

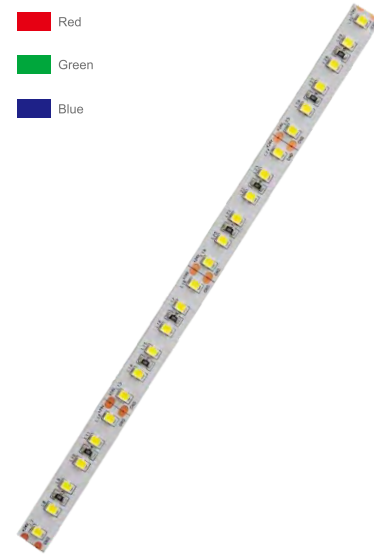


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	10mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+, 80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

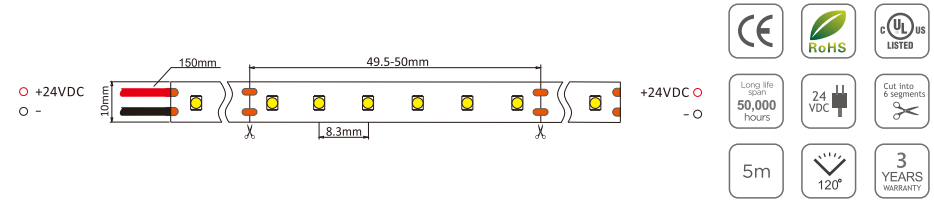

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S30F010-5050(12VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES


- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 7.2watts/m.
- Long life 50,000 hours.
- 3years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	7.2watts/m
Width	10mm
LED Qty	30LED/m
Voltage	12VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S30F010-5050(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 7.2watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	7.2watts/m
Width	10mm
LED Qty	30LED/m
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S48F010-5050(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

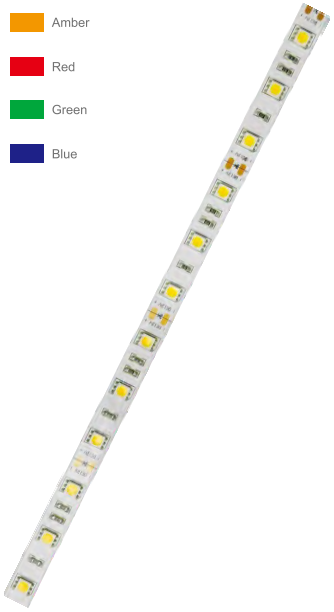


FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 11.5watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	11.5watts/m
Width	10mm
LED Qty	48LED/m
Voltage	12VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

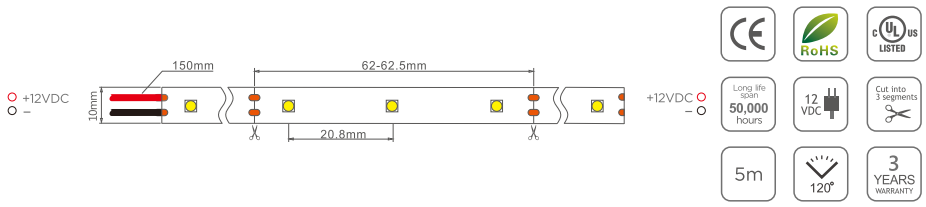


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S48F010-5050(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

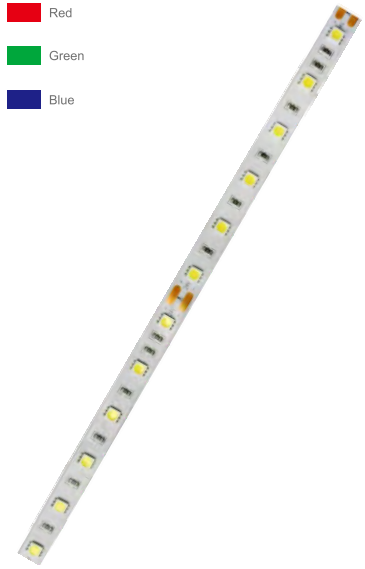


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 11.5watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	11.5watts/m
Width	10mm
LED Qty	48LED/m
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

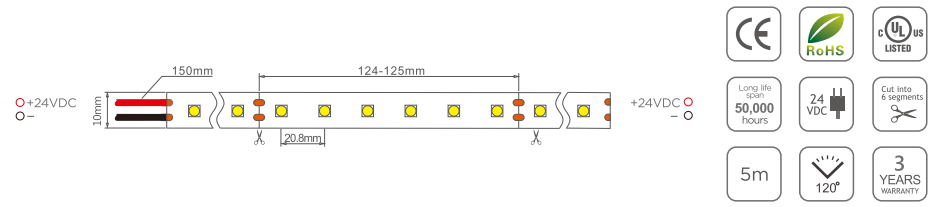

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F010-5050(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 14.4watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	14.4watts/m
Width	10mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

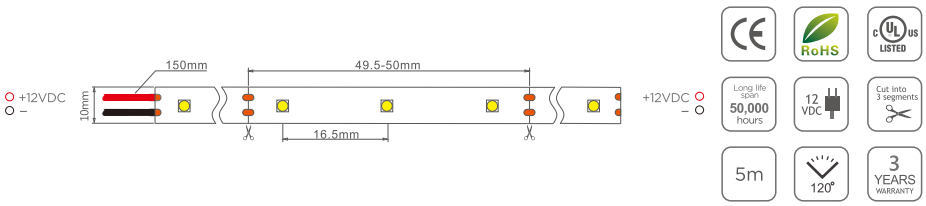


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F010(12)-5050(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

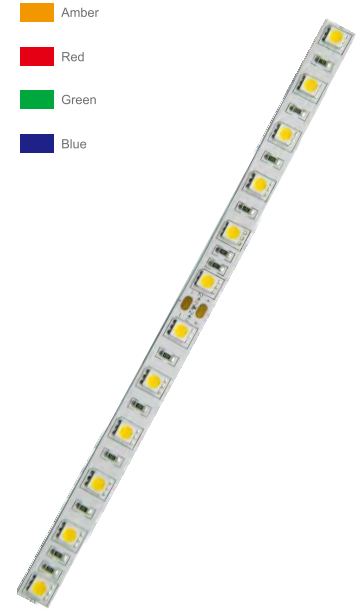


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 14.4watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	14.4watts/m
Width	10/12mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

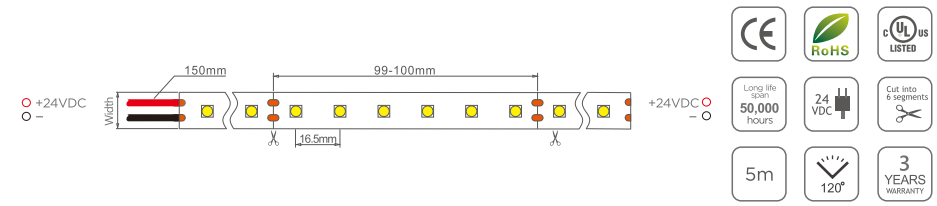

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S72F010-5050(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- 7 LEDs per cut, using constant current IC chip.
- DC 12V.
- Power 18watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	18watts/m
Width	10mm
LED Qty	72LED/m
Voltage	12VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

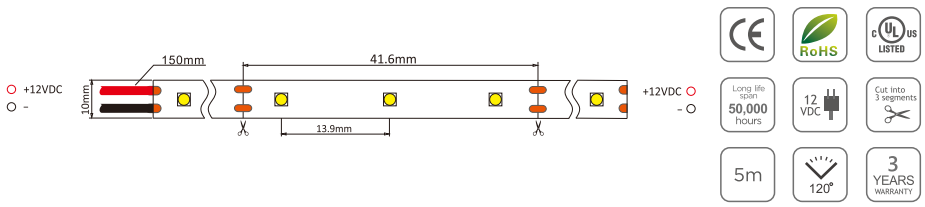

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S72F010-5050(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- 7 LEDs per cut, using constant current IC chip.
- DC 24V.
- Power 18watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	18watts/m
Width	10mm
LED Qty	72LED/m
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

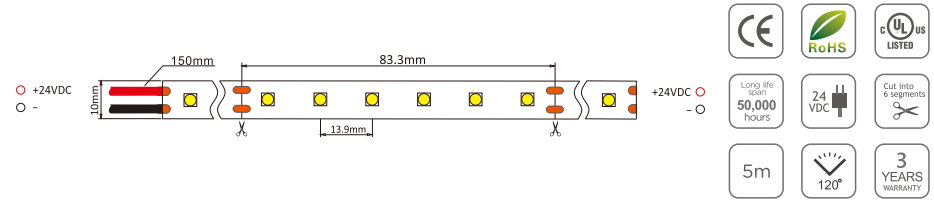

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F020-5050(12VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 28.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	28.8watts/m
Width	20mm
LED Qty	120LED/m
Voltage	12VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

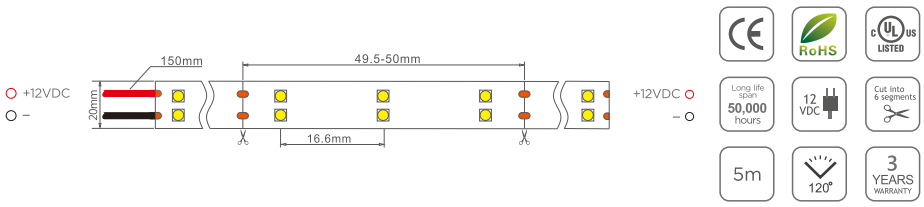


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F020-5050(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue

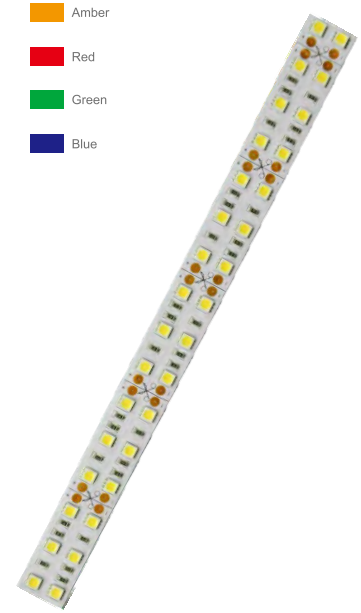


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 28.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	28.8watts/m
Width	20mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

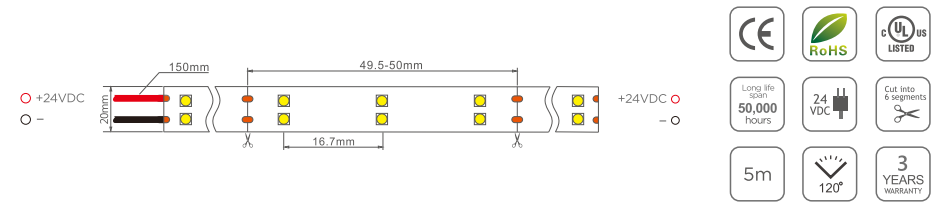


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB30F010-5050(12VDC)

RGB

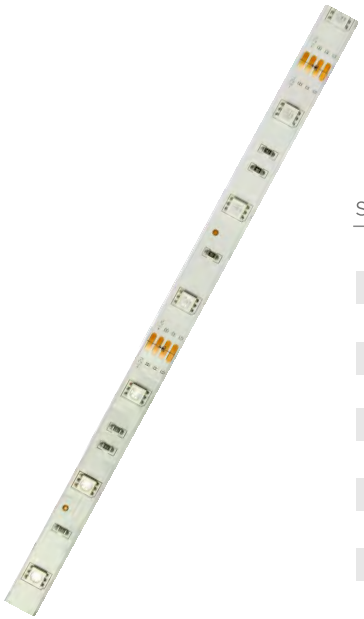


FEATURES


- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 7.2watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	7.2watts/m
Width	10mm
LED Qty	30LED/m
Voltage	12VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB30F010-5050(24VDC)

RGB




FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 7.2watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	7.2watts/m
Width	10mm
LED Qty	30LED/m
Voltage	24VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB48F010-5050(12VDC)

RGB




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 11.5watts/m.
- Long life 50,000 hours.
- 3years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	11.5watts/m
Width	10mm
LED Qty	48LED/m
Voltage	12VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB48F010-5050(24VDC)

RGB

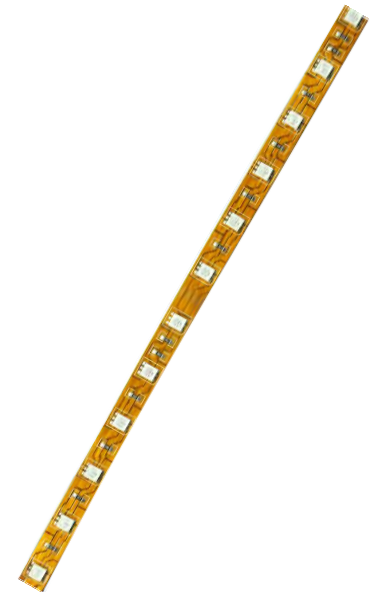


FEATURES


- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 11.5watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	11.5watts/m
Width	10mm
LED Qty	48LED/m
Voltage	24VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB60F010-5050(12VDC)

RGB

FEATURES


- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 14.4watts/m.
- Long life 50,000 hours.
- 3years warranty.
- Dimmable optional.
- CE, RoHs.




SPECIFICATIONS

Length	5 meters/Roll
Power	14.4watts/m
Width	10mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB60F010-5050(24VDC)

RGB

FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 14.4watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	14.4watts/m
Width	10mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB120F020-5050(12VDC)

RGB




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 28.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	28.8watts/m
Width	20mm
LED Qty	120LED/m
Voltage	12VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

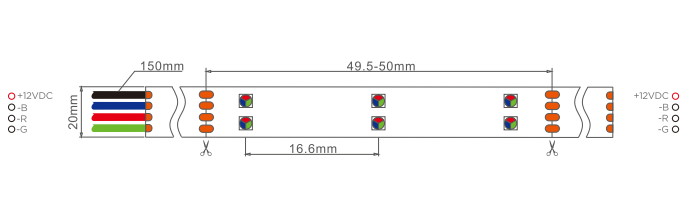



APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB120F020-5050(24VDC)

RGB




FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 28.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	28.8watts/m
Width	20mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

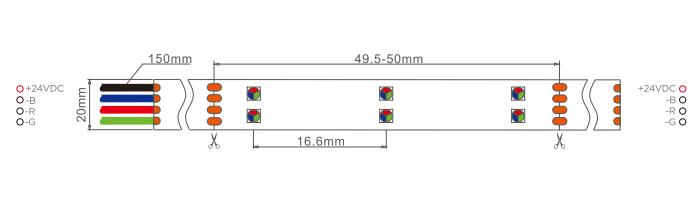



APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S30F008-3528(12VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 2. 4watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	2.4watts/m
Width	8mm
LED Qty	30LED/m
Voltage	12VDC
Brightness	6-7lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

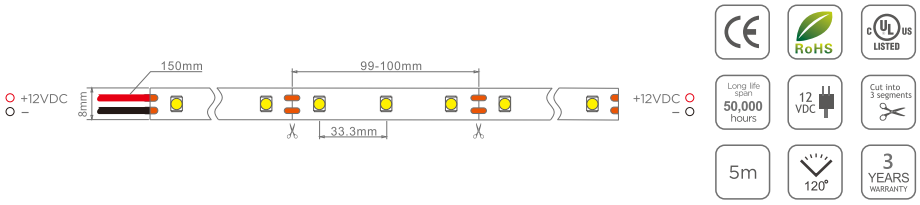


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S30F008-3528(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue

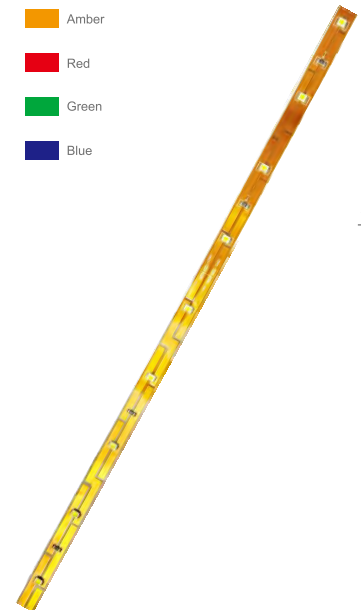


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 2.4watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	2.4watts/m
Width	8mm
LED Qty	30LED/m
Voltage	24VDC
Brightness	6-7lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

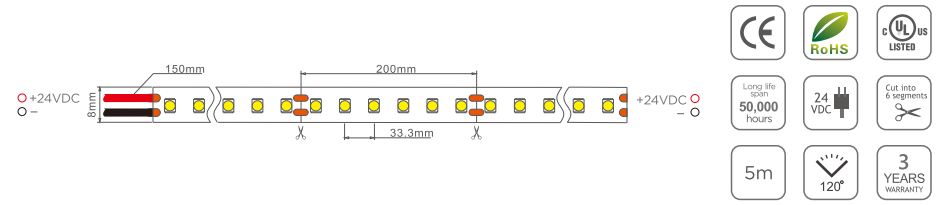

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F008-3528(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 4.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	4.8watts/m
Width	8mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	6-7lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

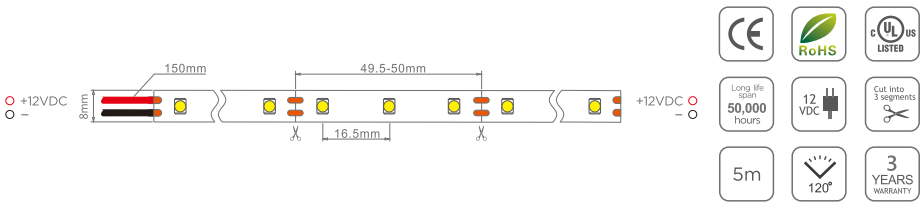


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F008-3528(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

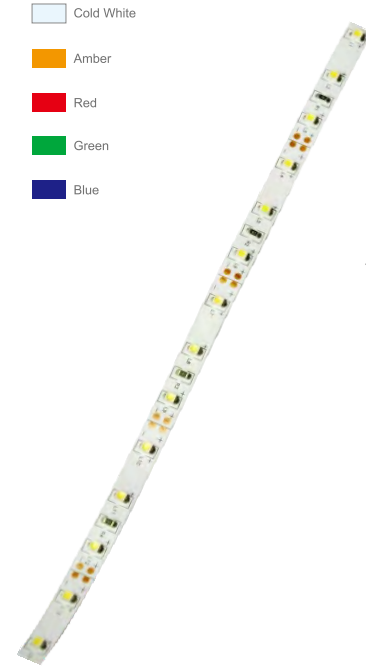


FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 4.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	4.8watts/m
Width	8mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	6-7lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

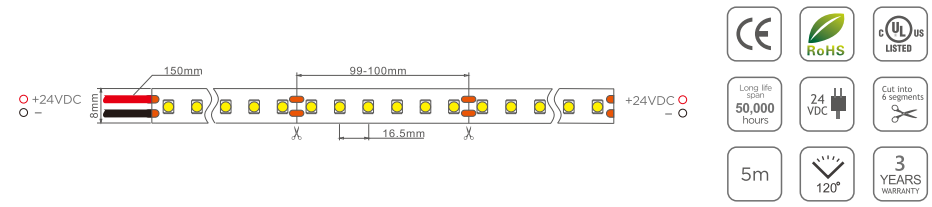

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F010-3528(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	10mm
LED Qty	120LED/m
Voltage	12VDC
Brightness	6-7lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F010-3528(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	10mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	6-7lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

uniforma

5730 FLEXIBLE STRIPS >>>



HH-S60F010-5730

Warm White

Neutral White

Cold White




FEATURES


- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 18watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	18watts/m
Width	10mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	40-45lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.


-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S36F010-5730(24VDC)

Warm White

Neutral White

Cold White

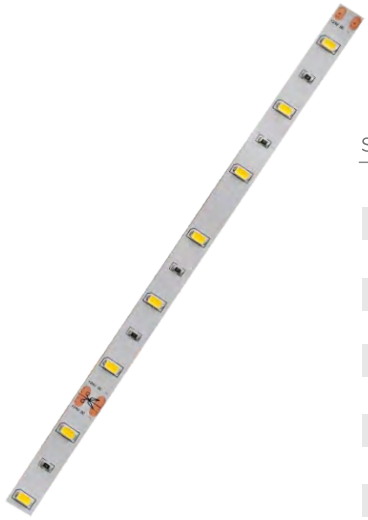


FEATURES


- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 13watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	13watts/m
Width	10mm
LED Qty	36LED/m
Voltage	24VDC
Brightness	40-45lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F010-5730(24VDC)

Warm White

Neutral White

Cold White




FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 18watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	18watts/m
Width	10mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	40-45lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S72F012-5730(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue

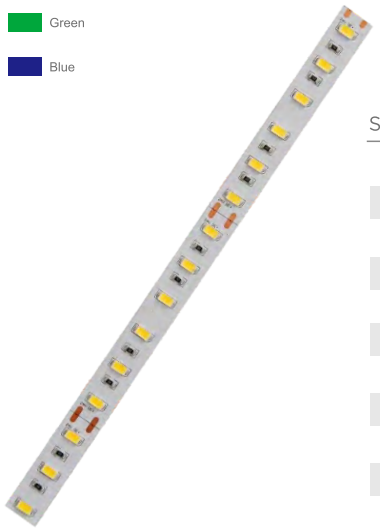


FEATURES


- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	12mm
LED Qty	72LED/m
Voltage	24VDC
Brightness	40-45lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.


uniforma



SLIM STRIPS >>>

HH-S140F003-2216(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue

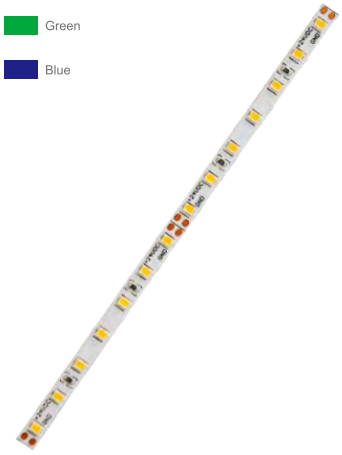


FEATURES

- Ultra slim led strips, 3.5mm width.
- DC 24V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	3.5mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	13-15lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

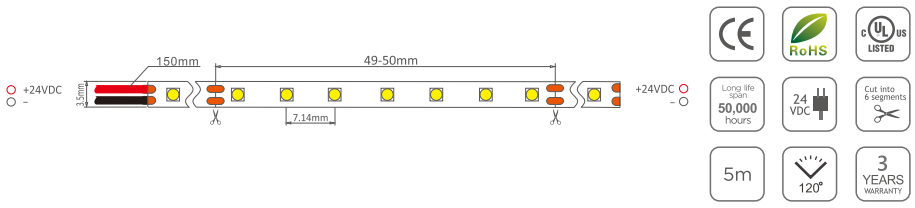

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F005-2835(12VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- Ultra slim led strips, 5mm width.
- DC 12V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	5mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

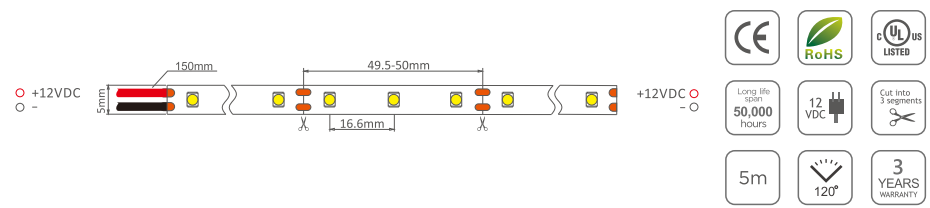

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F005-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES


- Ultra slim led strips, 5mm width.
- DC 24V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	5mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

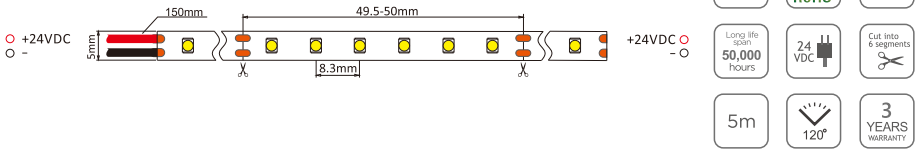



APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

uniforma

HH-S168F005-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Ultra slim led strips, 5mm width.
- DC 24V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	5mm
LED Qty	6LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

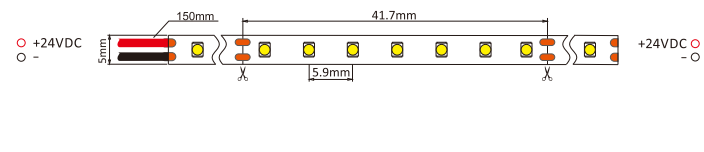



APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S70F005-5730CC(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- 7 LEDs per cut, using constant current IC chip.
- DC 24V.
- Power 15watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	15watts/m
Width	5mm
LED Qty	70LED/m
Voltage	24VDC
Brightness	40-45lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

NOLINEAR STRIPS >>>

uniforma



HH-S60F006-2835S(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	8watts/m
Width	6mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+, 90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S60F006-2835S(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- S type bendable led strip, 6mm width.
- DC 24V.
- Power 8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	8watts/m
Width	6mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F010-2835G(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue

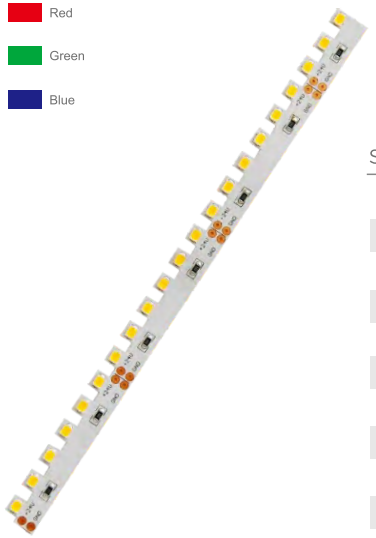


FEATURES

- Great wall led strip. Variable Beam.
- DC 24V.
- Power 20watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	20watts/m
Width	10mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

uniforma



DOTLESS STRIPS >>>

HH-S280F010-2216(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- High density, not dots in aluminum profiles.
- DC 24V.
- Power 20watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	20watts/m
Width	10mm
LED Qty	280LED/m
Voltage	24VDC
Brightness	13-15lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

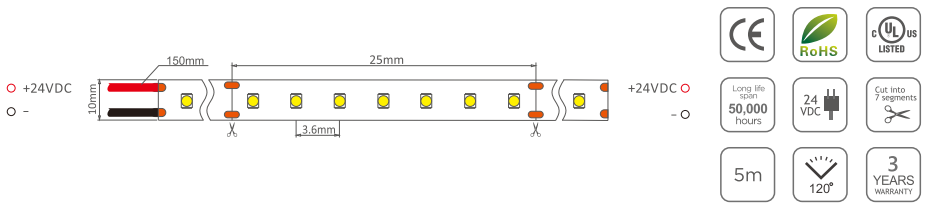

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S224F012-2835(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- High efficiency, not dots in aluminum profiles.
- DC 24V.
- Power 26watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	26watts/m
Width	12mm
LED Qty	224LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

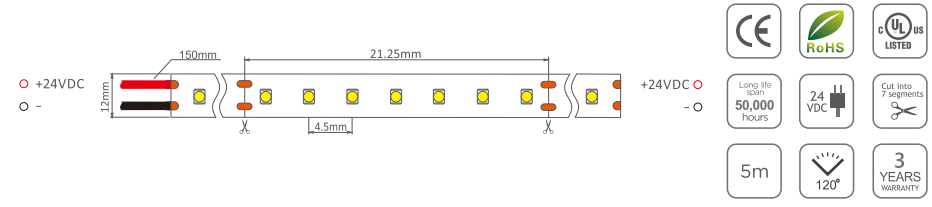

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S240F010-2835(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- High density, no dots in aluminum profiles.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	10mm
LED Qty	240LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

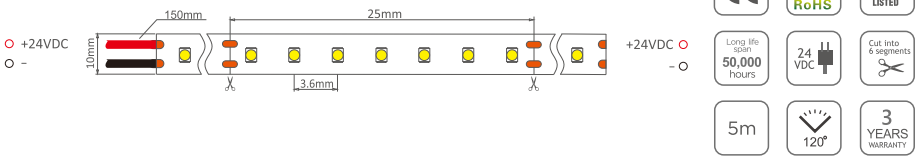



APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

uniforma



MULTI-ROWS STRIPS >>>

HH-S240F015-2835(12VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- Dual rows, high brightness.
- DC 12V.
- Power 28watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	28watts/m
Width	15mm
LED Qty	240LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S240F015-2835(24VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 28watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	28watts/m
Width	15mm
LED Qty	240LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S280F020-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

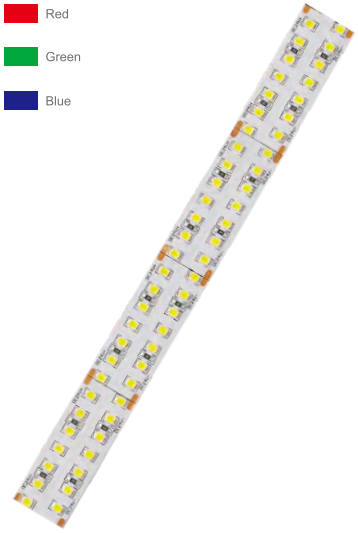


FEATURES

- High efficiency, 14 LEDs per cut, dual rows.
- DC 24V.
- Power 28watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	28watts/m
Width	20mm
LED Qty	280LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

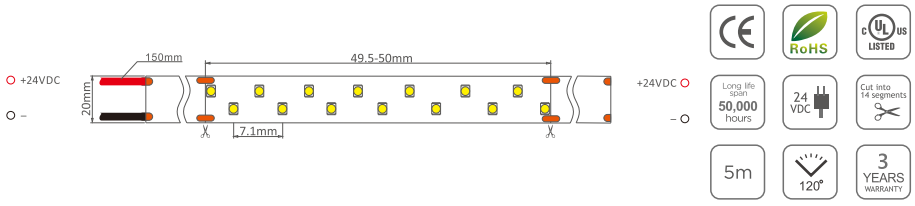


APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S420F030-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

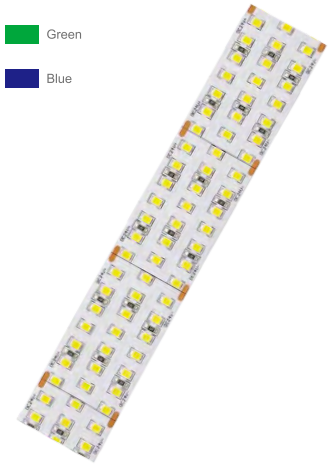


FEATURES

- High efficiency, 21 LEDs per cut, triple rows.
- DC 24V.
- Power 36watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	36watts/m
Width	30mm
LED Qty	420LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

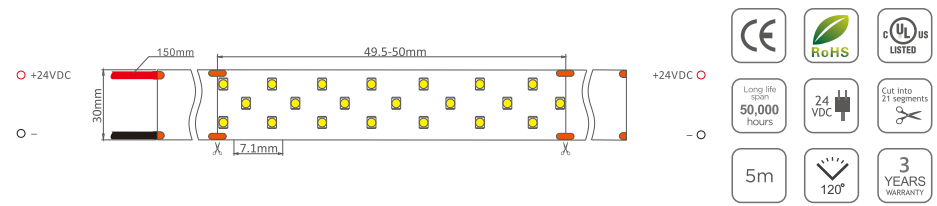

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S792F022-2835(24VDC)

Warm White

Neutral White


Cold White

Amber

Red

Green

Blue

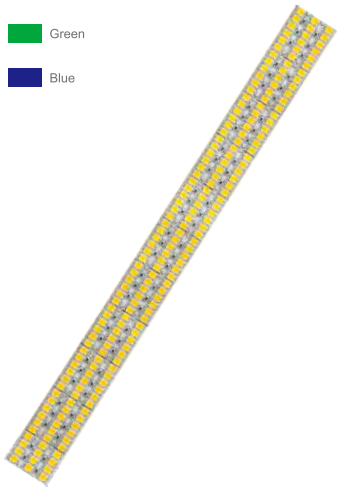


FEATURES

- Tri-Row strip, high power.
- DC 24V.
- Power 52watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	52watts/m
Width	22mm
LED Qty	792LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Warm White(2600K)+Cold White(12000K)
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.


uniforma

CCT VARIABLE STRIPS >>>



HH-S60F010-3527

CCT Variable

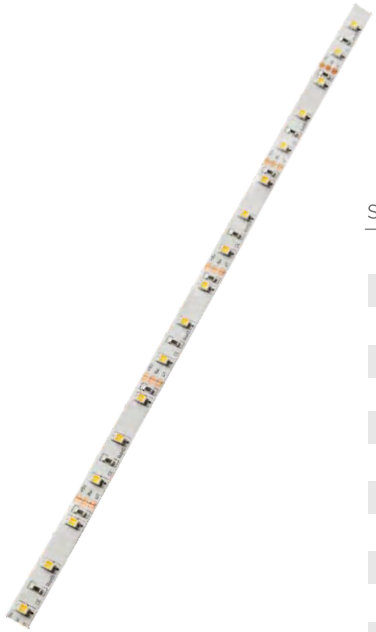


FEATURES

- 1 LED CCT Variable.
- DC 12V.
- Power 12watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	12watts/m
Width	10mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	20-22lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Warm White(2600K)+Cold White(6500K)
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

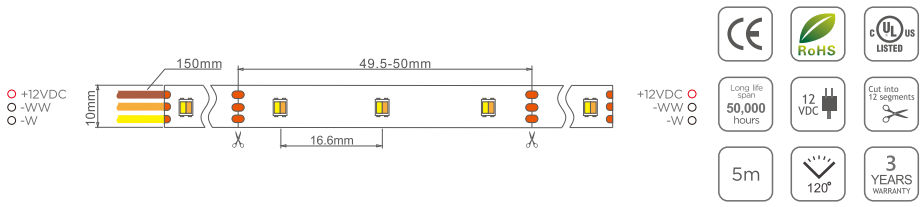

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F010-3527(24VDC)

CCT Variable




FEATURES

- 2 colors in 1 LED, CCT adjustable led strip.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	10mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

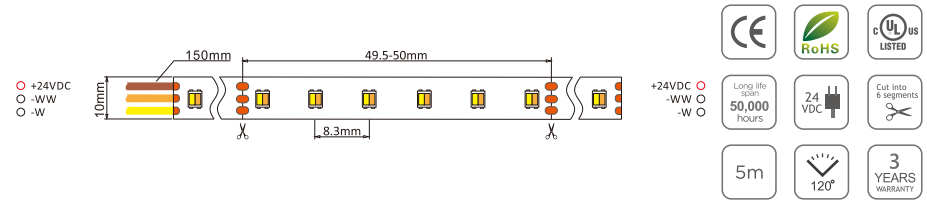

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S40F010-5050

CCT Variable

FEATURES


- 2LED cut CCT Variable strip.
- DC 12V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	10mm
LED Qty	40LED/m
Voltage	12VDC
Brightness	20-22lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	Warm White(2600K)+Cold White(6000K)
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S96F012-5050CCT

CCT Variable

FEATURES


- 5050 color temperature Variable.
- DC 24V.
- Power 23watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	23watts/m
Width	12mm
LED Qty	96LED/m
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

uniforma



RGB+WHITE STRIPS >>>

HH-SRGBW96F013-5050(24VDC)

RGB + White



FEATURES

- RGB changing with single white color.
- DC 24V.
- Power 23watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	23watts/m
Width	13.5mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB+White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.


-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGBW60F012-5050(12VDC)

RGB + White

FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 14.4watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

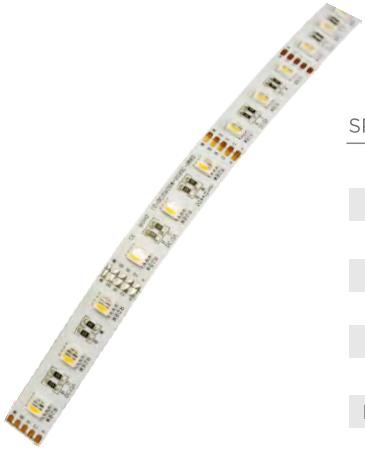

SPECIFICATIONS

Length	5 meters/Roll
Power	14.4watts/m
Width	12mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	16-18lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	-
Color	RGB+White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGBW60F012-5050(24VDC)

RGB + White

uniforma

FEATURES


- RGBW 4 colors in 1 LED.
- DC 24V.
- Power 14.4watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	14.4watts/m
Width	12mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGBCCT60F012-5050(24VDC)

RGB + White




FEATURES

- RGBW 4 colors in 1 LED.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	12mm
LED Qty	60LED/m 5050 120LED/m 3014
Voltage	24VDC
Brightness	18-20lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	RGB/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

SIDE VIEW STRIPS »»

uniforma



HH-S60F008-335(12VDC)

Warm White

Neutral White

Cold White




FEATURES

- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 4.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	4.8watts/m
Width	8mm
LED Qty	60LED/m
Voltage	12VDC
Brightness	5-6lm/LED
Beam	90°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F008-335(24VDC)

Warm White

Neutral White

Cold White




FEATURES

- Mercury free, no UV or IR emissions.
- DC 24V.
- Power 4.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	4.8watts/m
Width	8mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	5-6lm/LED
Beam	90°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S120F008-335

Warm White

Neutral White

Cold White

FEATURES


- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	8mm
LED Qty	120LED/m
Voltage	12VDC
Brightness	5-6lm/LED
Beam	90°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-SRGB60F010-335

Warm White

Neutral White

Cold White

FEATURES


- Mercury free, no UV or IR emissions.
- DC 12V.
- Power 4.8watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.



SPECIFICATIONS

Length	5 meters/Roll
Power	4.8watts/m
Width	8mm
LED Qty	90LED/m
Voltage	12VDC
Brightness	5-6lm/LED
Beam	90°
Thickness	2, 3, 4 OZ
CRI	70+,80+
Color	White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.

-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.


uniforma

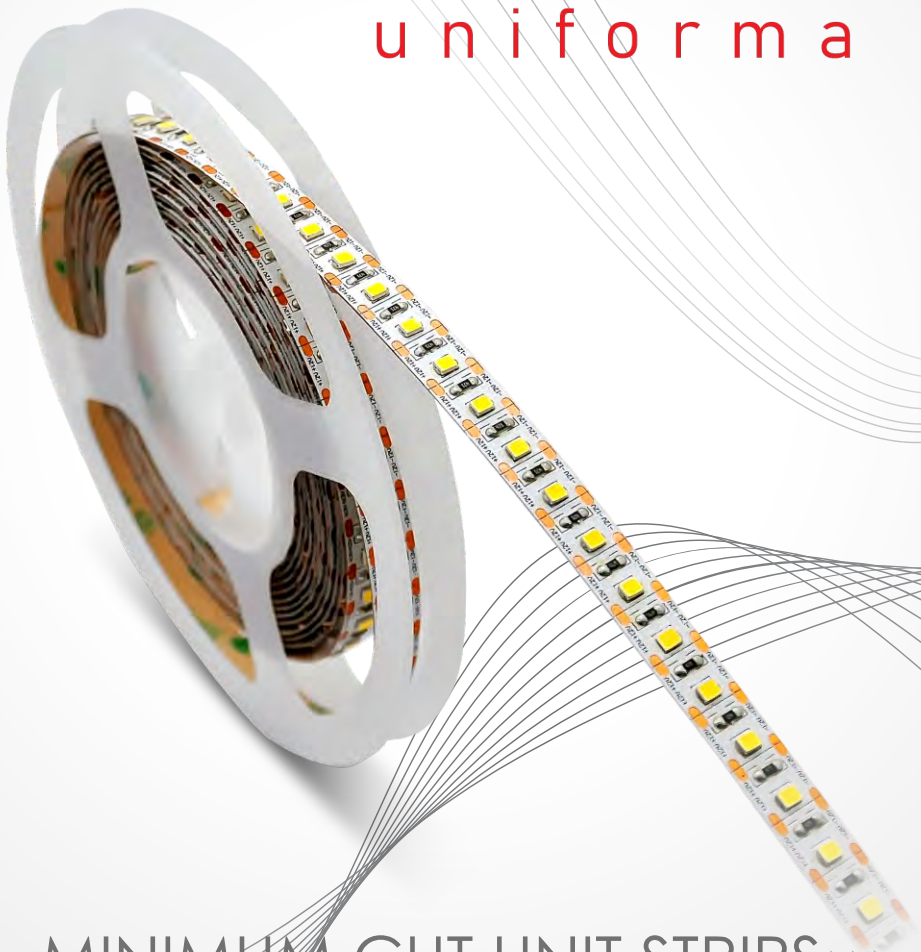

MINIMUM CUT UNIT STRIPS

HH-S100F010-5050(12VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

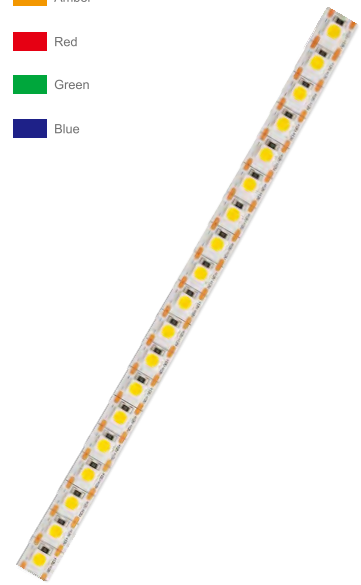


FEATURES

- 1 cm cut strip.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	10mm
LED Qty	100LED/m
Voltage	12VDC
Brightness	20-22lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S100F010-2835(12VDC)

- Warm White
- Neutral White
- Cold White
- Amber
- Red
- Green
- Blue




FEATURES

- One LED pet cut, minimum cutting length is 10mm.
- DC 12V.
- Power 22watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	22watts/m
Width	10mm
LED Qty	100LED/m
Voltage	12VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.


ZERO BRIGHTNESS LOSS STRIPS >>>

uniforma



HH-S40F010-5050(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

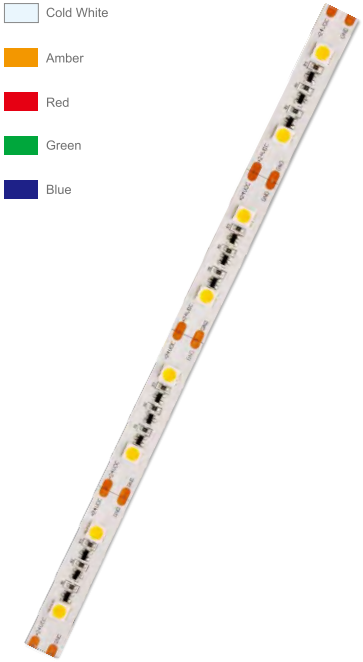


FEATURES


- Voltage Dropping persistence strip.
- DC 24V.
- Power 9.6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	9.6watts/m
Width	10mm
LED Qty	40LED/m
Voltage	24VDC
Brightness	20-22lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE






APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S60F012-5050(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue

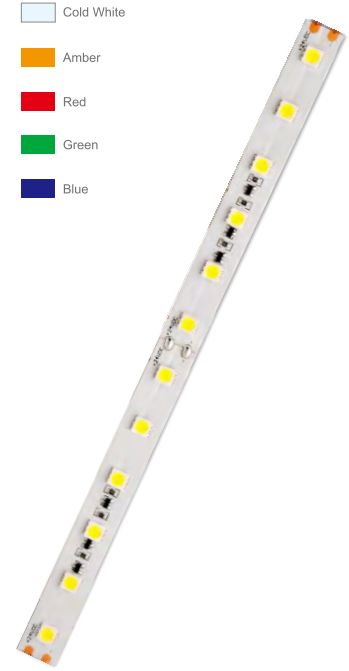


FEATURES

- Voltage Dropping persistence strip.
- DC 24V.
- Power 14.4watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	14.4watts/m
Width	12mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	20-22lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE





APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S30F010-2835CC(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Using constant current triodes.
- DC 24V.
- Power 6watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	6watts/m
Width	10mm
LED Qty	30LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

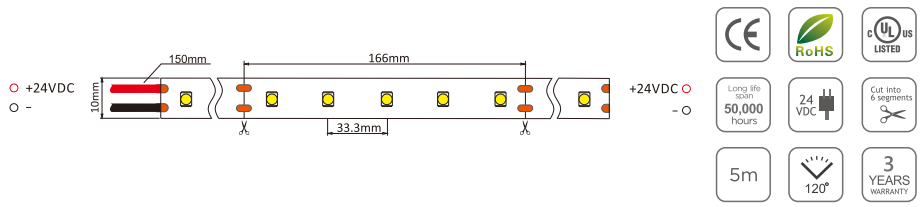

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S60F010-2835CC(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Using constant current triodes.
- DC 24V.
- Power 12watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	12watts/m
Width	10mm
LED Qty	60LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

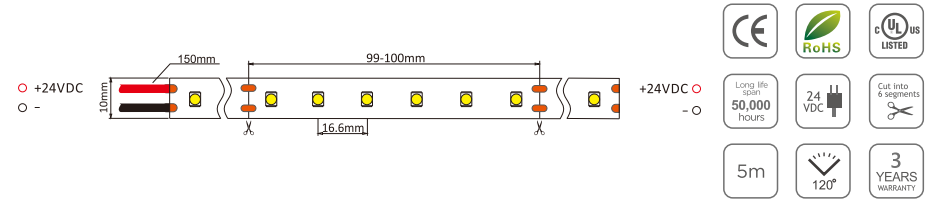

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S70F010-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- High efficiency, 7 LEDs per cut.
- DC 24V.
- Power 12watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	12watts/m
Width	10mm
LED Qty	70LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

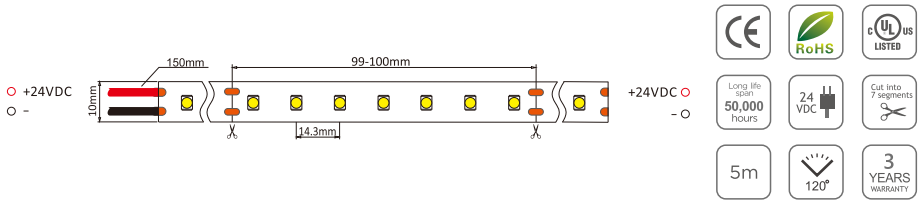

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S120F010-2835CC(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- Using constant current triodes.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	10mm
LED Qty	120LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

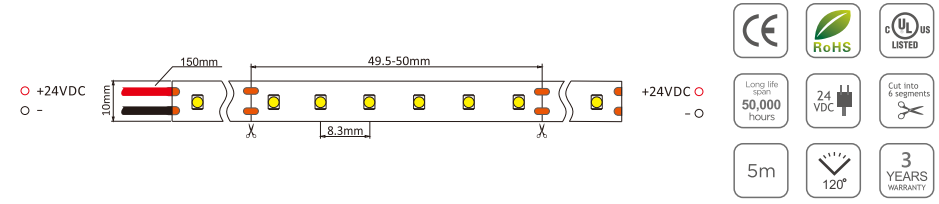

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

HH-S140F010-2835(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- High efficiency, 7 LEDs per cut.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	10mm
LED Qty	140LED/m
Voltage	24VDC
Brightness	22-24lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

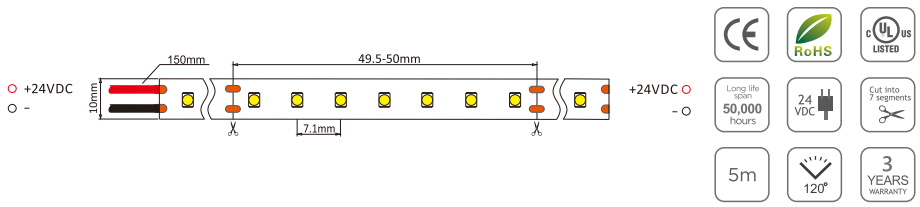

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com

HH-S126F012-5730CC(24VDC)

Warm White
Neutral White
Cold White
Amber
Red
Green
Blue




FEATURES

- 7 LEDs per cut, using constant current IC chip.
- DC 24V.
- Power 24watts/m.
- Long life 50,000 hours.
- 3 years warranty.
- Dimmable optional.
- CE, RoHs.

SPECIFICATIONS

Length	5 meters/Roll
Power	24watts/m
Width	12mm
LED Qty	126LED/m
Voltage	24VDC
Brightness	40-45lm/LED
Beam	120°
Thickness	2, 3, 4 OZ
CRI	70+,80+,90+
Color	Red/Blue/Green/Yellow/White/Warm White
IP rating	IP 65 / IP 67 / IP 68

STRUCTURE

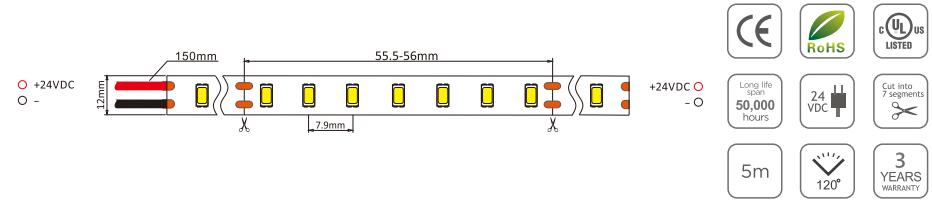

APPLICATIONS

-Linear Lighting, cover lighting, indirection lighting.
-3D Letters, AD Boxes, light boxes.
-Interior design, specialty lighting, mood lighting, festival lighting.
-Outdoor building decoration, skyline effect ,wall washer.
-Landscape lighting, space area design.

www.uni-forma.com



Waterproof type




IP54 PU Coating



IP54 Silicone Glue



IP54 Heat Shrink Tube



IP67 Silicone Tube



IP68 Silicone Tube with Glue



IP68 Extrued Silicone

• PIN Connector Collection



1	HH-4PIN-1 4PIN connector



2	HH-4PIN-2 4PIN extension



3	HH-4PIN-3 4PIN extension



4	HH-4PIN-4 4PIN L cornor



5	HH-4PIN-5 4PIN T Cornor



6	HH-4PIN-6 4PIN cross cornor



7	HH-4PIN-7 4PIN male connector



8	HH-PTC-1 4PIN to coupler transfer

• DC Plug Connector Collection



1	HH-DC-1 DC plug extension



2	HH-DC-2 DC plug extension



3	HH-DC-3 DC plug extension



4	HH-DC-4 DC female extension



5	HH-DTC-1 DC to coupler transfer

• Quick Power Wiring Collection



1	HH-DC-4A Jet connector



2	HH-DC-4B Jet connector



3	HH-T2-2 Wire Connector



4	HH-T1-1 Wire Connector



5	HH-P2-2 Wire Connector



6	HH-P1-1 Wire Connector

• Aluminium Profile Fit Inside Connectors



1	HH-A14-10 Profile Connectors



2	HH-A24-10 Profile Connectors



3	HH-A12-8(10) Profile Connectors



4	HH-A22-8(10) Profile Connectors

• Coupler Connector Collection



1	HH-2C-1 Coupler connector



2	HH-2C-2 Coupler connector



3	HH-2C-3 Coupler connector




4	HH-2C-4 Coupler connector



5	HH-4C-1 Coupler connector



6	HH-4C-2 Coupler connector




7	HH-2C-3 Coupler connector



8	HH-4C-4 Coupler connector


• Ip65 Strip Quick Connector



1	HH-IP8-2W IP65 Connector



2	HH-IP8-2C IP65 Connector



3	HH-IP0-4P IP65 Connector



4	HH-IP0-4C IP65 Connector

• Blister Packaging







• Color Box Packaging





